

OLYMPIAN™



GEP88-3

***Diesel Generator Set
Exclusively from your Cat® dealer***

Output Ratings		
Generating Set Model	Prime*	Standby*
380-415V, 50Hz	80.0 kVA 64.0 kW	88.0 kVA 70.4 kW
480V, 60 Hz	90.0 kVA 72.0 kW	100.0 kVA 80.0 kW

* Refer to ratings definitions on page 4.
Ratings at 0.8 power factor.

Technical Data		
Engine Make & Model:	Perkins 1104A-44TG2	
Alternator Model:	LL2014L	
Base Frame Type:	Fbc2 - (08Hr)	
Circuit Breaker Type:	3 Pole MCCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Fuel Tank Capacity: litres (US gal)	219 (57.9)	
Fuel Consumption, Prime: l/hr (US gal/hr)	18.0 (4.8)	21.2 (5.6)
Fuel Consumption, Standby : l/hr (US gal/hr)	19.9 (5.3)	23.6 (6.2)

Engine Technical Data

Physical Data			
Manufacturer:	Perkins		
Model:	1104A-44TG2		
No. of Cylinders/Alignment:	4 / In Line		
Cycle:	4 Stroke		
Induction:	Turbocharged		
Cooling Method:	Water		
Governing Type:	Mechanical		
Governing Class:	ISO 8528 G2		
Compression Ratio:	17.25:1		
Displacement: l (cu.in)	4.4 (268.5)		
Bore/Stroke: mm (in)	105.0 (4.1)/127.0 (5.0)		
Moment of Inertia: kg m ² (lb. in ²)	1.14 (3896)		
Engine Electrical System:			
-Voltage/Ground:	12/Negative		
-Battery Charger Amps:	65		
Weight: kg (lb) - Dry:	463 (1021)		
- Wet:	485 (1069)		

Air System		50 Hz	60 Hz
Air Filter Type:	Replaceable Element		
Combustion Air Flow:			
m ³ /min (cfm)	-Standby:	5.1 (180)	6.5 (230)
	-Prime:	4.8 (170)	6.2 (219)
Max. Combustion Air Intake			
Restriction: kPa (in H ₂ O)		8.0 (32.1)	8.0 (32.1)
Radiator Cooling Air Flow:			
m ³ /min (cfm)		121.2 (4280)	140.4 (4958)
External Restriction to			
Cooling Air Flow: Pa (in H ₂ O)		120 (0.5)	120 (0.5)

Cooling System		50 Hz	60 Hz
Cooling System Capacity:			
l (US gal)		13.0 (3.4)	13.0 (3.4)
Water Pump Type:	Centrifugal		
Heat Rejected to Water & Lube Oil: kW (Btu/min)			
	-Standby:	51.0 (2900)	57.0 (3242)
	-Prime:	46.0 (2616)	53.0 (3014)
Heat Radiation to Room:			
kW (Btu/min)	-Standby:	14.0 (796)	15.0 (853)
	-Prime:	13.0 (739)	14.0 (796)
Radiator Fan Load: kW (hp)		1.0 (1.3)	1.7 (2.3)
Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Olympian dealer for power ratings at specific site conditions.			

Lubrication system	
Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity l (US gal):	8.0 (2.1)
Oil Pan l (US gal):	7.0 (1.8)
Oil Type:	API CG4 / CH4 15W-40
Cooling Method:	Water

Performance	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Gross Engine Power: kW (hp)		
-Standby:	80.7 (108.0)	92.6 (124.0)
-Prime:	73.4 (98.0)	84.2 (113.0)
BMEP: kPa (psi)		
-Standby:	1468.0 (212.9)	1403.0 (203.5)
-Prime:	1335.0 (193.6)	1276.0 (185.1)
Regenerative Power: kW	7.0	9.0

Fuel System				
Fuel Filter Type:	Replaceable Element			
Recommended Fuel:	Class A2 Diesel			
Fuel Consumption: l/hr (US gal/hr)				
	110% Load	100% Load	75% Load	50% Load
Prime				
50 Hz	19.9 (5.3)	18.0 (4.8)	13.6 (3.6)	9.5 (2.5)
60 Hz	23.6 (6.2)	21.2 (5.6)	16.2 (4.3)	11.5 (3.0)
Standby				
50 Hz		19.9 (5.3)	14.9 (3.9)	10.3 (2.7)
60 Hz		23.6 (6.2)	17.8 (4.7)	12.5 (3.3)
(based on diesel fuel with a specific gravity of 0.84 and conforming to BS2869, Class A2)				

Exhaust System		50 Hz	60 Hz
Silencer Type:	Industrial		
Silencer Noise Reduction	SD80 (1)		
Pressure Drop Across Silencer System: kPa (in Hg)		1.17 (0.345)	1.97 (0.581)
Silencer Noise Reduction Level: dB		16	16
Max. Allowable Back Pressure: kPa (in. Hg)		10.0 (3.0)	15.0 (4.4)
Exhaust Gas Flow:			
m ³ /min (cfm)	-Standby:	13.3 (470)	15.9 (560)
	-Prime:	12.5 (441)	15.0 (530)
Exhaust Gas Temperature: °C (°F)			
m ³ /min (cfm)	-Standby:	580 (1076)	560 (1040)
	-Prime:	555 (1031)	535 (995)

Alternator Performance Data

Data Item	50 Hz				60 Hz				
	415/240V	400/230V 230/115V 200/115V	380/220V 220/110V	220/127V	480/277V 240/139V	380/220V 220/110V	240/120V 208/120V	230/115V	440/254V 220/127V
Motor Starting Capability* kVA	218	206	189	240	239	161	188	176	207
Short Circuit Capacity** %	300	300	300	300	300	300	300	300	300
Reactances: Per Unit									
Xd	2.400	2.590	2.860	2.140	2.420	3.870	3.230	3.490	2.880
X'd	0.080	0.090	0.100	0.070	0.080	0.130	0.110	0.120	0.100
X''d	0.040	0.043	0.048	0.036	0.040	0.064	0.054	0.058	0.048

Reactances shown are applicable to standby ratings.
* Based on 30% voltage dip at 0.6 power factor.
** With optional Permanent Magnet generator or AREP excitation.

Alternator Technical Data

Physical Data		Operating Data	
Manufacturer:	OLYMPIAN	Overspeed: RPM	2250
Model:	LL2014L	Voltage Regulation (steady state) (%):	+/- 0.5
No. of Bearings:	1	Wave Form NEMA = TIF:	50
Insulation Class:	H	Wave Form IEC = THF:	2.0%
Winding Pitch - Code:	2/3 - 6	Total Harmonic Content LL/LN:	4.0%
Wires:	12	Radio Interference:	Supression is in line with European Standard EN61000-6
Ingress Protection Rating:	IP23	Radiant Heat: kW (Btu/min)	
Excitation System:	SHUNT		
AVR Model:	R250		
		-50 Hz:	6.8 (387)
		-60 Hz:	8.0 (455)

Technical Data

3 Phase Ratings and Performance at 50 Hz, 1500 RPM

Voltage	Prime		Standby	
	kVA	kW	kVA	kW
415/240V	80.0	64.0	88.0	70.4
400/230V	80.0	64.0	88.0	70.4
380/220V	80.0	64.0	88.0	70.4
230/115V [†]	80.0	64.0	88.0	70.4
220/127V	80.0	64.0	88.0	70.4
220/110V [†]	80.0	64.0	88.0	70.4
200/115V [†]	80.0	64.0	88.0	70.4

[†] Not available from our Chinese facility - Tianjin.

Weights & Dimensions



Weights: kg (lb)	
Net (+ lube oil)	1107 (2440)
Wet (+ lube oil & coolant)	1120 (2469)
Fuel, lube oil & coolant	1305 (2878)

3 Phase Ratings and Performance at 60 Hz, 1800 RPM

Voltage	Prime		Standby	
	kVA	kW	kVA	kW
480/277V	90.0	72.0	100.0	80.0
220/127V	90.0	72.0	100.0	80.0
380/220V	88.0	70.4	97.0	77.6
240/120V	90.0	72.0	100.0	80.0
230/115V	90.0	72.0	100.0	80.0
440/254V	90.0	72.0	100.0	80.0
220/110V [†]	88.0	70.4	97.0	77.6
208/120V [†]	90.0	72.0	100.0	80.0
240/139V [†]	90.0	72.0	100.0	80.0

Dimensions: mm (in)

Length	1925 (75.8)
Width	1120 (44.1)
Height	1361 (53.6)

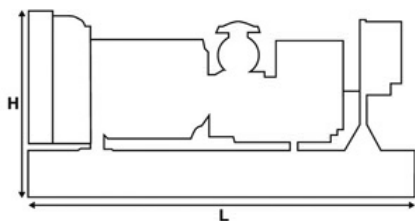

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Definitions

Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

General Data

Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

Quality Standards

BS4999, BS5000, BSEN60034, BSEN61000, IEC60034.

Warranty

All equipment carries full manufacturer's warranty.

Information contained in this publication may be considered confidential.

Discretion is recommended when distributing.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos OLYMPIAN, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

www.OlympianPower.com

©2011 Caterpillar
All rights reserved.
Printed in U.S.A.

Market: International
LEHF0109-01 (07-11)